

METERING CUM ISOLATOR PANEL

- * Rated Voltage : 12-24-36KV
- * Rated Current : 400-630A



**SALIENT FEATURES**

- * Simple & Sturdy Construction made of 2 mm thick CRCA/GI sheet duly powder coated/epoxy painted suitable for outdoor installation.
- * Can be installed outdoor, covered room not required.
- * Protection of Electrical system with HT HRC fuses.
- * Trips quickly & breaks automatically at blowing of any of the fuses.
- * Protection IP : 55.
- * Voltage presence indicators.
- * Door interlock with earthing switch for personal safety.
- * LBS CPRI tested as per IS:9920.
- * Option with Vacuum Circuit Breaker (VCB) is also available.

ACCESSORIES ON REQUEST

- * Current Transformers & Voltage Transformers (CT & PT) for measurement as per desired specifications.
- * Energy Meter.

OVERALL DIMENSIONS IN MM

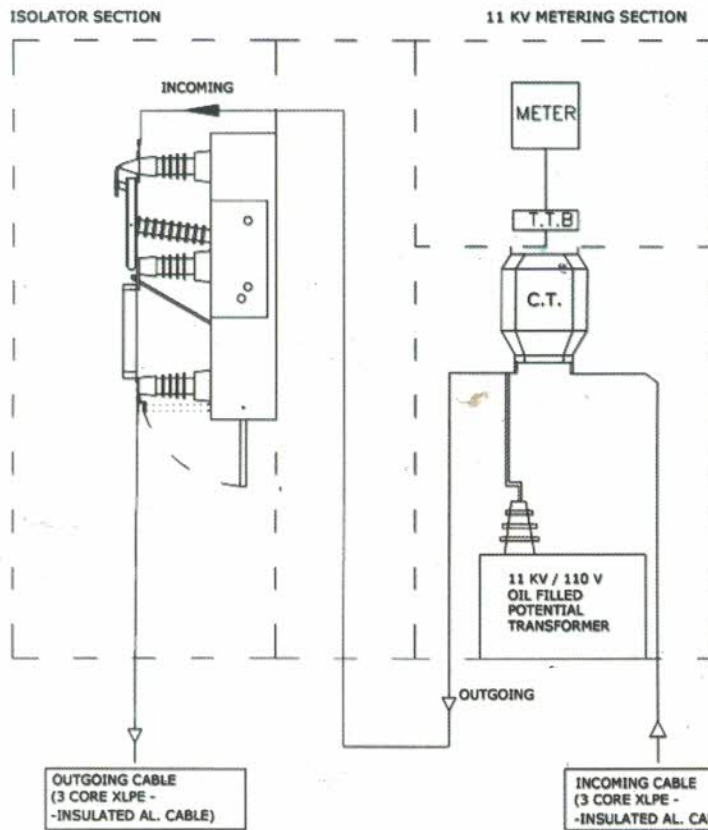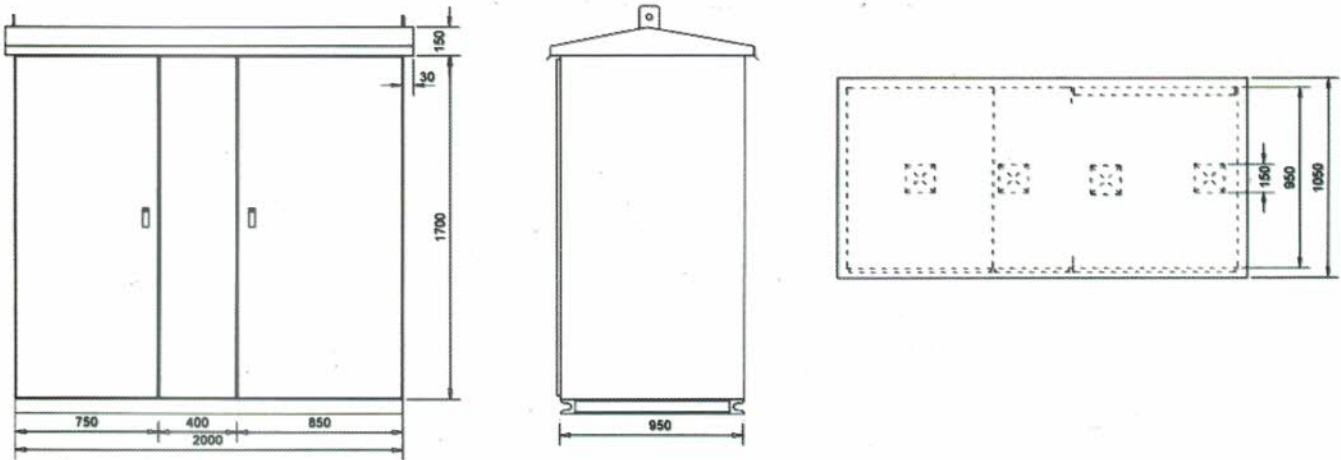

ELECTRICAL FEATURES

Rated Voltage	kV	12
Rated Current	A	630
Frequency	Hz	50
Rated short time current	(kA x 1s)	18.96
Rated making current	kA	31.5
Lighting impulse test voltage	kV	28 KVrms/75 Kvp

IPL/MIP 1/20

For further details contact :
ISOTECH INDIA PVT.LTD.

Mktg. Office: Plot no. 1, Vijay Vihar, Behind IBM (Star Mall), NH-8, DLF Silokhra, Gurugram-122001, Haryana (INDIA)
Tel.: 91-09212807523, 09810386806

Works: Dulina Industrial Area, 8th KM Stone, Near Distt. Jail, Jhajjar-124103, Haryana (INDIA)
Tel.: 91-1251-324523
e-mail : isotechindia@gmail.com
www.isotechindia.com



ISO 9001 : 2015